

RH35M-4DK.4C.1R

article no. with supply cable adapter

460V 112 920




Performance data

3~ 460V ±10% Y 60Hz IP54

Connection diagram 106XA

P_1	0.45	kW
I	0.78	A
n	1620	rpm
I_A	2.7	A
ΔI	5	%
t_R	70/158	°C/°F
m	6.4/14	kg/lbs.


Characteristic data

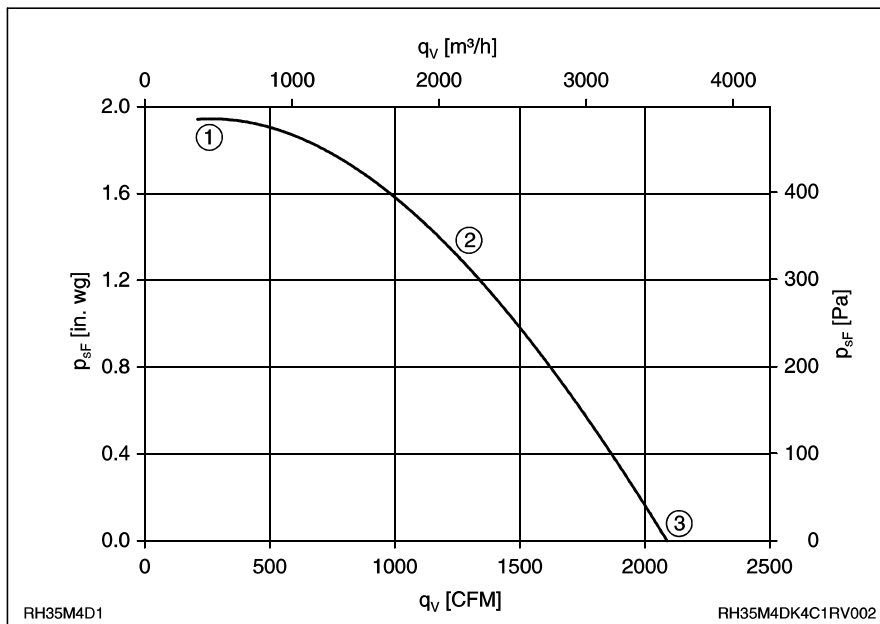

	U	I	P_1	n	L_{WA}
	V	A	W	rpm	dB
①	0.65	320	1680		
②	460	0.78	450	1620	72
③	0.68	350	1670	82	

$$P_{d2} = 2.5 \cdot 10^{-6} \cdot q_v^2$$

SPEZIAL DESIGN ON REQUEST
WITH CABLE SIDE OR WITH TERMINAL BOX

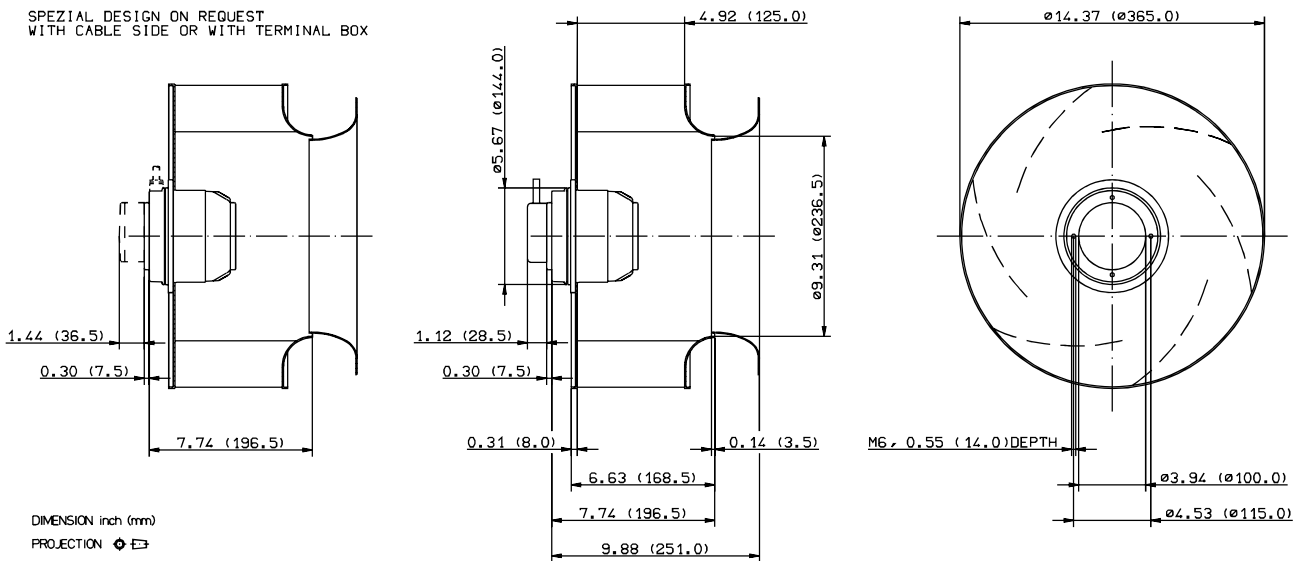

L-KL-1784/1-D02-INCH