


Motorlüfterrad einflutig

Motorized impeller single inlet

RH40G-4DK.2F.1R

Art.Nr. mit seitlichem Anschlusskabel
Art.no. with cable side

129 253




Leistungsdaten
Performance data

3~ 400V ±10%
50Hz IP44

Anschlusschaltbild 106XA
Connection diagram



P ₁	0,41	kW
I	0,68	A
n	1240	min ⁻¹
I _A	2,0	A
ΔI	0	%
t _R	70	°C
m	6,4	kg

Kennliniendaten
Characteristic data

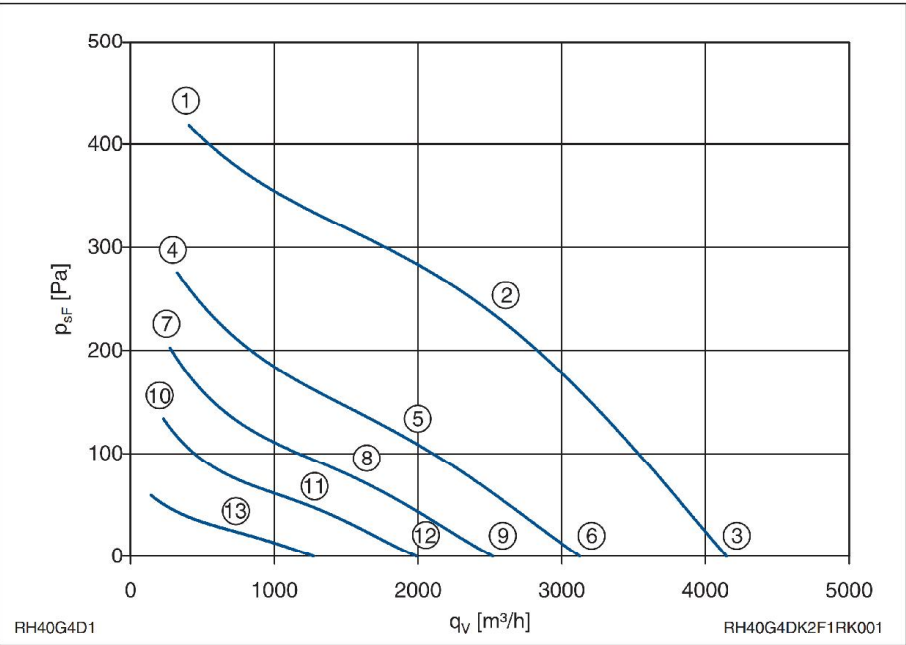

U	I	P ₁	n	L _{WA}
V	A	W	min ⁻¹	dB
①	0,54	260	1350	
②	400	0,68	410	67
③	0,63	360	1280	75
④	0,50	180	1100	
⑤	230	0,65	250	58
⑥	0,61	230	960	67
⑦	0,48	140	640	
⑧	180	0,60	180	54
⑨	0,55	160	790	63
⑩	0,46	110	770	
⑪	140	0,52	120	49
⑫	0,51	120	640	59
⑬	90	0,40	60	390

$p_{d2} = 1,85 \cdot 10^{-6} \cdot q_v^2$

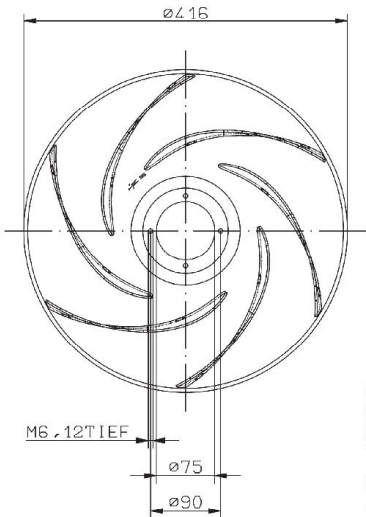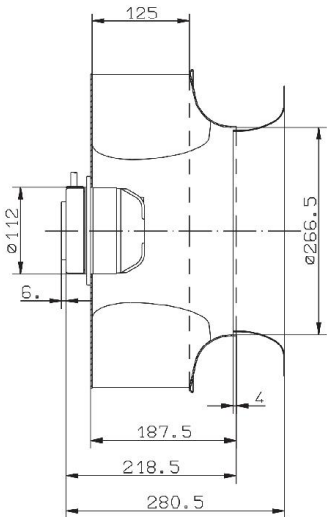

L-KL-2316/3