

Motorlüfterrad einflutig

Motorized impeller single inlet

RH40G-4EK.4F.1R

Art.Nr. mit Kabelbox
Art.no. with supply cable adapter

113 027




Leistungsdaten
Performance data

1~ 230V ±10%
50Hz IP44

Anschlussschaltbild 104XA
Connection diagram

P ₁	0,46	kW
I	2,2	A
n	1320	min ⁻¹
I _A	4,9	A
ΔI	15	%
C _{400V}	8	μF
t _R	65	°C
m	8,8	kg



Kennliniendaten
Characteristic data

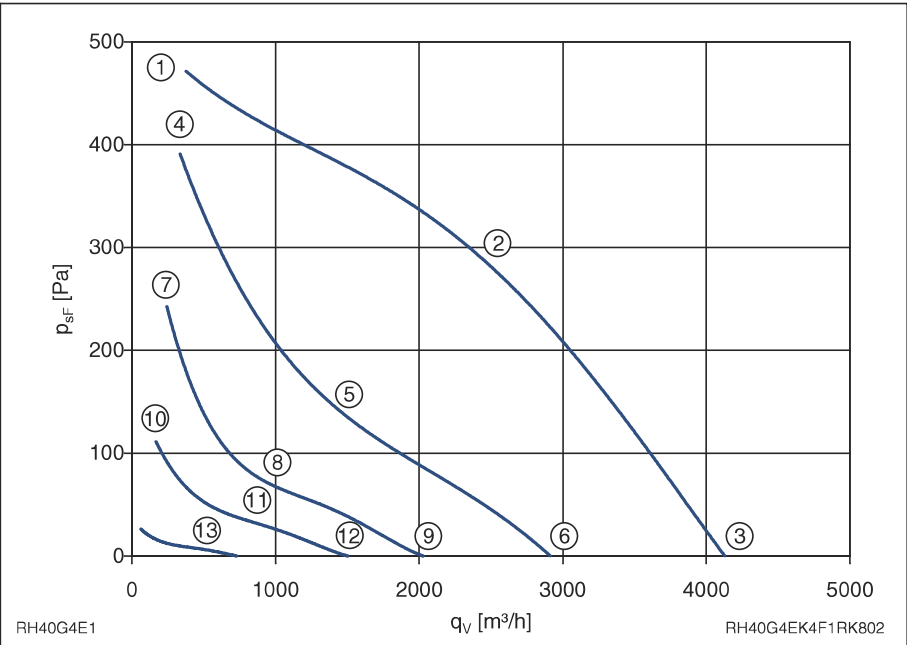

U	I	P ₁	n	L _{WA}	
V	A	W	min ⁻¹	dB	
①	1,5	300	1420		
②	230	2,2	460	1320	68
③	2,0	410	1350	76	
④	1,6	240	1290		
⑤	160	2,5	320	870	60
⑥	2,4	320	970	67	
⑦	1,85	200	1020		
⑧	130	2,1	220	630	56
⑨	2,1	210	670	60	
⑩	1,65	140	690		
⑪	105	1,7	140	450	
⑫	1,7	140	500		
⑬	60	1,0	45	240	

$p_{d2} = 1,85 \cdot 10^{-6} \cdot q_v^2$

SONDERAUSFUEHRUNG AUF ANFRAGE
MIT KABEL SEITLICH ODER MIT KLEMMENKASTEN /
SPEZIAL DESIGN ON REQUEST
WITH CABLE SIDE OR WITH TERMINAL BOX

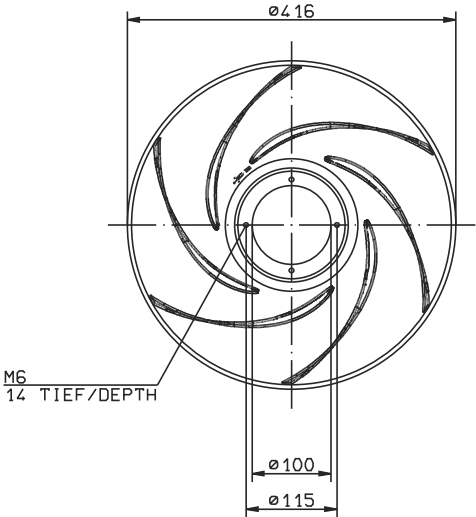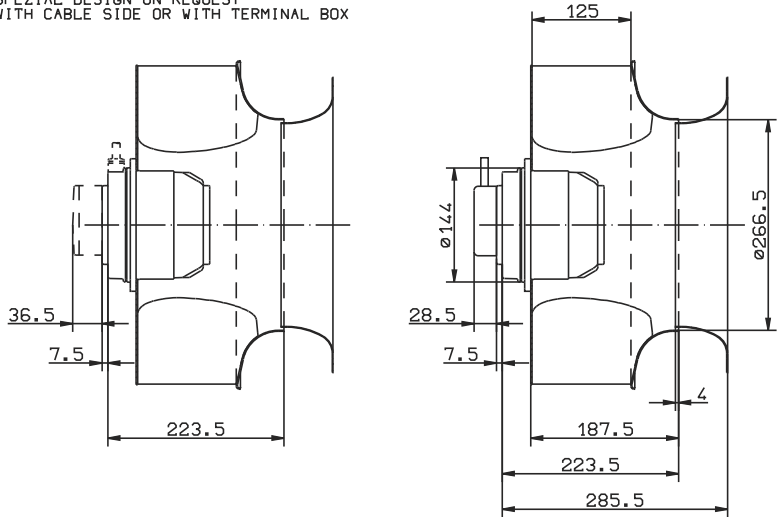

L-KL-2316/4-D02