

RHA 400D4.123B-2D


产品编码
Art. no.
1130140***

性能数据
Performance data

3~400V±10% Y
50Hz IP 54

P₁0.54kW
I_n1.23A
n1350rpm
I_A/I_n3.11
C_{400V}--μF
t_R65°C
m10.5kg

性能曲线/ Characteristic data

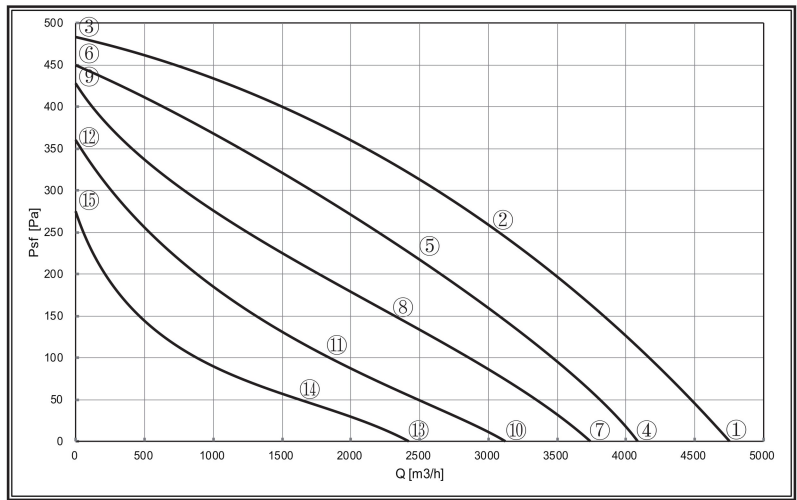

	U V	P ₁ W	I _n A	n rpm	L _{WA} dB
①		399	1.10	1401	
②	400	537	1.22	1352	77
③		236	0.85	1442	
④		336	0.92	1286	
⑤	280	428	1.13	1194	74
⑥		190	0.64	1391	
⑦		295	0.94	1181	
⑧	230	352	1.11	1066	71
⑨		177	0.61	1333	
⑩		230	0.93	993	
⑪	180	253	1.05	872	67
⑫		155	0.64	1228	
⑬		157	0.86	788	
⑭	140	165	0.91	677	62
⑮		122	0.65	1058	

接线图/ Electrical Connection

JX-009
Y

U₁red(红)
V₁green(绿)
W₁yellow(黄)
TKwhite(白)
PEyellow-green(黄/绿)

TK TK W₁ V₁ U₁ ⊕
L₁ L₂ L₃ PE

特殊要求/ Special Requirements

☐ 热敏开关 TK

☐ 顶出线 Top

☐ 引出线 1.0m stub

☐ 引出线 1.5m stub

☐ 引出线 2.0m stub

☐ 整体方案 (标准型)
RMBA standard case

☐ 整体方案 (加高型)
RMBA enhanced case

☐ 整体方案 (开放式)
RMBB case

☐ 喷塑色号
RAL

☐ 不锈钢紧固件
stainless fastener

结构图/ Construction

12376

Ø404
Ø100
6.57

Ø355
Ø395
Ø422

184.5
220
289
(331)

1.2

8-Ø11

配2123540001导风圈
Use No.2123540001 inletcone

Ø1154-M6*12

64123

Ø374
Ø350
Ø325
6-Ø9
1

Ø100
Ø404
6.57

184.5
220
277
(319.5)

配2123440001导风圈
Use No.2123440001 inletcone

离心风机/ Centrifugal fan

45

SHIRO 施依洛